

G-2 Adaptor Kit IB-QB2

With Connector Studs that enable G-2 panniers to be used with G-2-compatible touring carriers.




Tools Required: 4 mm, 3 mm Allen keys.

Compatibility Ibera PakRak Touring Carriers Plus+ (IB-RA4-G2, IB-RA5-G2).

SET UP CARRIER TO USE G-2 PANNIERS

Remove stopper bolt with 4 mm Allen key, and plastic plug from side rail (see fig. 1).* Install studs by seating them on top of holes in rails and screwing bolts from underside with 3 mm Allen key (see fig. 2). Tighten securely.

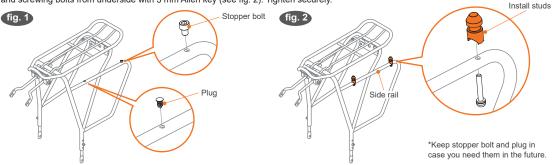


USING PANNIERS

There is a latch with two stud recesses on rear of pannier (see fig. 3).

To mount panniers: align stud recesses with studs and let pannier slide onto studs (push down if necessary).

To detach panniers: press release levers together, and lift off with hand carry strap (see fig. 4).

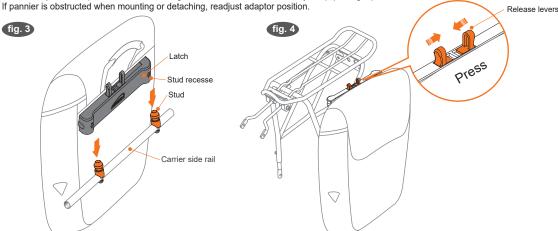

Warning 1

- · Not compatible with seatpost-mounted carriers and some types of city bike carriers.
- If your heel brushes pannier when pedaling, reposition adaptor further towards rear of carrier.
- · Always ensure pannier is secure on carrier before using.
- Ensure there are no straps or other items protruding from pannier.
- DANGER-pannier should never make contact with rear wheel. To check this, attach panniers, and shake bike vigorously. Repeat this
 with pannier fully packed. If any part of pannier touches wheel, you may need to reconsider your carrier setup. Consult a bicycle shop
 for advice.
- · Do not use for off-road riding.
- For better stability, pack heaviest items in bottom of pannier. Panniers may be used singularly, but a pair of evenly loaded panniers provides better bike balance.

Limited Warranty

Ibera warrants this product for normal usage against workmanship, and material defects to the original purchaser for two year from purchase date. Products purchased online are not covered by this warranty unless purchased from an authorised lbera online store. 1. User assumes all risk of personal injury, damage to or failure of the product when it is used in jumping, acrobatics or similar activities. 2. Warranty does not cover any incidental or consequential damages, such as personal injury or other losses due to accident, neglect, misuse, abuse, modification, normal wear and tear, improper care and cleaning, or failure to follow included instructions.

Ibera Co. Ltd.

Specifications subject to change without notice.
Ibera is a trademark of Ibera Co. Ltd. All other
trademarks are property of their respective
owners. Copyright Ibera Co. Ltd.
Made in Taiwan.

Artwork: 04/23

